



**VARIATION OF CONDITIONS ATTACHED TO APPROVAL  
Bango Wind Farm, Boorowa, NSW (EPBC 2013/6810)**

This decision to vary conditions of approval is made under section 143 of the *Environment Protection and Biodiversity Conservation Act 1999* (EPBC Act).

**Approved action**

---

**Person to whom the approval is granted**      BWF Nominees Pty Ltd  
ACN 633 105 405

---

**Approved action**      To construct and operate a wind farm and associated infrastructure near Boorowa, NSW (refer [Annexure A](#)) [See EPBC Act referral 2013/6810]

---

**Variation**

---

**Variation of conditions attached to approval**      The variation is:  
  
Delete condition 9 and 11 attached to the approval and substitute with conditions 9 and 11 specified in the table below.

---

**Date of effect**      This variation has effect on the date the instrument is signed

---

**Person authorised to make decision**

---

**Name and position**      Kim Farrant  
Assistant Secretary  
Environment Assessments (Vic, Tas) and Post Approvals Branch

---

**Signature**

---

**Date of decision**      13 September 2022

---

Date of decision	Conditions attached to approval
Variation dated 4/4/2019	<p>1. The <b>approval holder</b> must:</p> <ul style="list-style-type: none"> <li>a. Implement conditions 8, 9, 11 and 12 of Schedule 2 and conditions 16, 17, 18, 19 (a) and (c), 20 and 21 of Schedule 3 of the <b>NSW development consent</b> as they relate to impacts on protected matters.</li> <li>b. Notify the <b>Department</b> in writing of any proposed change to the conditions of the <b>NSW development consent</b> for which <b>EPBC Act</b> condition 1a applies, no later than 5 <b>business days</b> after proposing a change or becoming aware of the NSW Government proposing a change.</li> <li>c. Notify the <b>Department</b> in writing of any change to the <b>NSW development consent</b> for which <b>EPBC Act</b> condition 1a applies within 5 <b>business days</b> of a change being finalised.</li> </ul>
Variation dated 4/4/2019	<p>2. The <b>approval holder</b> must not clear more than:</p> <ul style="list-style-type: none"> <li>a. 39.54 ha of <b>Golden Sun Moth</b> habitat (as marked in pink and purple on the map at Annexure B)</li> <li>b. 9.54 ha of <b>Superb Parrot</b> habitat (as marked in brown on the map at Annexure C).</li> <li>c. 0.32 ha of <b>Box Gum Woodland</b> (as marked in red on the map at Annexure D).</li> <li>d. 8 <b>primary hollow bearing trees</b> (as marked on the map at Annexure C).</li> </ul>
Variation dated 4/4/2019	<p>3. The <b>approval holder</b> must protect <b>known and potential Superb Parrot nest trees</b> by:</p> <ul style="list-style-type: none"> <li>a. Only conducting blasting within 50m and clearing within 30m of <b>known and potential Superb Parrot nest trees</b> between 1 February and 31 August (outside the breeding season).</li> <li>b. Locating wind turbines at least 50m away from <b>known and potential Superb Parrot nest trees</b>.</li> <li>c. locating onsite infrastructure, with the exception of wind turbines, at least 30m away from <b>known and potential Superb Parrot nest trees</b>.</li> </ul> <p><b>Note:</b> For the purposes of this section, crane hardstands and turbine foundations are not considered turbines.</p>
Variation dated 4/4/2019	<p>4. The <b>approval holder</b> must submit plans for site layout required by condition 11 and 12 of Schedule 2 of the <b>NSW development consent</b> to the <b>Minister</b> at the same time as it is submitted to the Secretary of the Department of Planning and Environment for approval.</p>
Variation dated 4/4/2019	<p>5. The <b>approval holder</b> must submit a Biodiversity Management Plan (BMP) to the <b>Minister</b> for approval. <b>Commencement of the action</b> must not occur unless the <b>Minister</b> has approved the BMP. The <b>approval holder</b> must implement the approved BMP.</p> <p>The BMP must include:</p> <ul style="list-style-type: none"> <li>a. Spatial maps, description and quantification of the final disturbance footprint in relation to proposed impacts to <b>protected matters</b>, including the number, type of <b>hollow bearing trees</b> and size of hollows to be removed.</li> <li>b. Management measures to ensure the protection and maintenance of habitat for <b>protected matters</b> during the construction and operational phases of the approved action.</li> </ul>
Variation dated 19/11/2020	<p>6. The <b>approval holder</b> must submit a Bird and Bat Adaptive Management Plan (BBAMP) to the <b>Minister</b> for approval. The <b>approval holder</b> must not export electricity for sale from more than 23 wind turbines simultaneously, other than for the purposes of hold point testing and commissioning, unless the <b>Minister</b> has approved the BBAMP in writing. The <b>approval holder</b> must implement the approved BBAMP.</p>

Date of decision	Conditions attached to approval
	<p>The BBAMP must include, but is not limited to:</p> <ul style="list-style-type: none"> <li>a. An on-going monitoring program, which must include a description of the methodology and frequency of monitoring.</li> <li>b. Trigger levels to shut down any turbines when there is a high risk of collision based on monitoring data and the results of research conducted as part of <b>EPBC Act</b> condition 13 on <b>Superb Parrot</b> habitat use and breeding ecology.</li> </ul> <p>The results of the BBAMP monitoring program from each year must be submitted as part of the annual report required under <b>EPBC Act</b> condition 17.</p>
Original dated 9/8/2018	7. If the <b>Minister</b> considers, based on monitoring taken under <b>EPBC Act</b> condition 6, compliance reporting required by <b>EPBC Act</b> condition 17 and the risk assessment and mitigation measures included in the BBAMP, the operation of the action is having a detrimental impact on <b>protected matters</b> , then the <b>Minister</b> may notify the <b>approval holder</b> in writing that specified wind turbines must not be operated for a specified period of time. If the <b>Minister</b> makes a written notice under this condition, the <b>approval holder</b> must implement that written notice.
Original dated 9/8/2018	8. Prior to the <b>commencement of the action</b> , the <b>approval holder</b> must submit to the <b>Minister</b> , the calculation of biodiversity impacts consistent with Condition 18 of Schedule 3 of the <b>NSW development consent</b> as it relates to <b>protected matters</b> .
As varied on the date of this decision	9. By 4 November 2022, the <b>approval holder</b> must submit evidence of credit retirement consistent with condition 19 (a), (b) or (c) of Schedule 3 of the <b>NSW development consent</b> to the <b>Minister</b> .
Original dated 9/8/2018	<p>10. In the case that the <b>approval holder</b> is establishing <b>BioBanking site(s)</b>, they must ensure that the <b>BioBanking Agreement(s)</b> for the <b>BioBanking site(s)</b> include measures for the long-term management of <b>protected matters</b> including but not limited to:</p> <ul style="list-style-type: none"> <li>a. Specific reference to <b>Superb Parrot</b>, <b>Golden Sun Moth</b> and <b>hollow bearing trees</b> providing habitat to <b>Superb Parrot</b>.</li> <li>b. A textual description of the offset sites, including <b>offset attributes</b>, <b>shapefiles</b>, and a map clearly defining the location and boundaries of the proposed offset sites.</li> <li>c. Site survey and baseline data and documentation of key biodiversity threats and opportunities at each site.</li> <li>d. A detailed description of management actions and responsibilities designed to protect and improve the ecological quality of habitat of <b>Superb Parrot</b> and <b>Golden Sun Moth</b> on the offset sites.</li> <li>e. Key milestones, performance indicators and timeframes for each management action.</li> <li>f. A monitoring program to determine the effectiveness of the management actions.</li> <li>g. Corrective actions and contingency measures to be implemented where monitoring of the offset site shows that management actions are not effectively achieving key milestones or prescribed performance indicators are not being met or are unlikely to be met.</li> </ul> <p>Where appropriate offsets credits are acquired from the market, it is accepted that the credit provider has made suitable and appropriate measures to meet the above intent.</p>
As varied on the date of this decision	11. In the case that the <b>approval holder</b> is establishing <b>BioBanking site(s)</b> , it must submit a copy of the <b>BioBanking Agreement(s)</b> to the <b>Minister</b> by 4 November 2022.
Original dated 9/8/2018	12. For each <b>primary hollow bearing tree</b> (as marked in the map at Annexure C) removed within 50m of each turbine (as confirmed through quantification of <b>hollow bearing trees</b> impacts through <b>EPBC Act</b> condition 5), the <b>approval holder</b> must legally protect and secure 10 <b>hollow bearing trees</b> from the same vegetation formation within the <b>South-west Slopes of NSW Important Bird Area</b> .

Date of decision	Conditions attached to approval
	<p>Within two years of the <b>commencement of the action</b>, the <b>approval holder</b> must submit evidence to the <b>Minister's</b> satisfaction of the final number of <b>hollow bearing trees</b> to be legally protected and secured.</p>
<p>Original dated 9/8/2018</p>	<p>13. To compensate for potential cumulative impacts on <b>Superb Parrot</b>, the <b>approval holder</b> must prepare and implement a Superb Parrot Conservation Research Plan (SPCRP).</p> <p>The SPCRP must be submitted to the <b>Minister</b> for approval prior to <b>commencement of the action</b>. The action must not <b>commence</b> unless the <b>Minister</b> has approved the SPCRP. The approved SPCRP must be implemented.</p> <p>The SPCRP must contribute to better understanding <b>Superb Parrot</b> habitat use and breeding ecology within the <b>South-west Slopes of NSW Important Bird Area</b>, with a focus on identification of key breeding sites, better understanding local movement patterns during the breeding season and landscape scale movements between the key breeding areas and the winter foraging grounds.</p> <p>The SPCRP must contain, but is not limited to, the following:</p> <ul style="list-style-type: none"> <li>a. Conservation research activities consistent with the <i>National Recovery Plan for the Superb Parrot Polytelis swainsonii</i> (2011) or any subsequent revised version and reflect input and advice from the <b>National Superb Parrot Recovery Team</b>.</li> <li>b. Specific project objectives, indicative timetable for activities, nomination of persons or organisations responsible for carrying out the activities, and outline commitments to the provision and timing of funding.</li> </ul>
<p>Original dated 9/8/2018</p>	<p>14. The <b>approval holder</b> must provide at least \$100,000 each year for five years to fund the conservation research activities outlined in the SPCRP. The first year's contribution must be made within 20 <b>business days</b> from the <b>commencement of the action</b>.</p>
<p>Variation dated 4/4/2019</p>	<p>15. Within 14 <b>business days</b> after the <b>commencement of the action</b>, the <b>approval holder</b> must advise the <b>Department</b> in writing of the actual date of <b>commencement</b>.</p>
<p>Original dated 9/8/2018</p>	<p>16. The <b>approval holder</b> must maintain accurate records substantiating all activities associated with or relevant to these conditions of approval, including measures taken to implement the management plans, and make them available upon request to the <b>Department</b>. Such records may be subject to audit by the <b>Department</b> or an <b>independent auditor</b> in accordance with section 458 of the <b>EPBC Act</b>, or used to verify compliance with the conditions of approval. Summaries of audits will be published on the <b>Department's</b> website. The results of audits may also be publicised through the general media.</p>
<p>Variation dated 4/4/2019</p>	<p>17. Within three months of every 12 month anniversary of the <b>commencement of the action</b>, the <b>approval holder</b> must publish a report on its <b>website</b> addressing compliance with each of the conditions of this approval including implementation of the management plans. Documentary evidence providing proof of the date of publication must be provided to the <b>Department</b> at the same time as the compliance report is published. The report must remain published on the website for the duration of the approval. Reports must continue to be published until such time as advised by the <b>Minister</b> in writing.</p> <p><b>Note:</b> Compliance reports may be published on the <b>Department's</b> website. The first compliance report may report a period less than 12 months so that it and subsequent compliance reports align with the similar requirement under state approval.</p>
<p>Original dated 9/8/2018</p>	<p>18. Potential or actual contraventions of the conditions of the approval must be reported to the <b>Department</b> in writing within two <b>business days</b> of the <b>approval holder</b> becoming aware of the actual or potential contravention.</p>
<p>Original dated 9/8/2018</p>	<p>19. Upon the direction of the <b>Minister</b>, the <b>approval holder</b> must ensure that an independent audit of compliance with the conditions of approval is conducted and a report submitted to the <b>Minister</b>. The <b>independent auditor</b> must be approved by the</p>

Date of decision	Conditions attached to approval
	<b>Minister</b> prior to the commencement of the audit. Audit criteria must be agreed to by the <b>Minister</b> and the audit report must address the criteria to the satisfaction of the <b>Minister</b> .
Original dated 9/8/2018	20. If, at any time after five years from the date of this approval, the <b>approval holder</b> has not <b>commenced</b> the action, then the <b>approval holder</b> must not commence the action without the written agreement of the <b>Minister</b> .
Variation dated 4/4/2019	<b>Revision of action management plans</b> 21. The <b>approval holder</b> may, at any time, apply to the <b>Minister</b> for a variation to an action management plan approved by the <b>Minister</b> under conditions 5 and 6, or as subsequently revised in accordance with these conditions, by submitting an application in accordance with the requirements of section 143A of the <b>EPBC Act</b> . If the <b>Minister</b> approves a revised action management plan (RAMP) then, from the date specified, the <b>approval holder</b> must implement the RAMP in place of the previous action management plan.
Variation dated 4/4/2019	21A. The <b>approval holder</b> may choose to revise an action management plan approved by the <b>Minister</b> under conditions 5 and 6, or as subsequently revised in accordance with these conditions, without submitting it for approval under section 143A of the <b>EPBC Act</b> , if the taking of the action in accordance with the RAMP would not be likely to have a <b>new or increased impact</b> .
Variation dated 4/4/2019	21B. If the <b>approval holder</b> makes the choice under condition 21A to revise an action management plan without submitting it for approval, the <b>approval holder</b> must: <ul style="list-style-type: none"> <li>a. notify the <b>Department</b> in writing that the approved action management plan has been revised and provide the <b>Department</b> with: <ul style="list-style-type: none"> <li>i. an electronic copy of the RAMP;</li> <li>ii. an electronic copy of the RAMP marked up with track changes to show the differences between the approved action management plan and the RAMP;</li> <li>iii. an explanation of the differences between the approved action management plan and the RAMP;</li> <li>iv. the reasons the <b>approval holder</b> considers that taking the action in accordance with the RAMP would not be likely to have a <b>new or increased impact</b>; and</li> <li>v. written notice of the date on which the <b>approval holder</b> will implement the RAMP (RAMP implementation date), being at least 20 <b>business days</b> after the date of providing notice of the revision of the action management plan, or a date agreed to in writing with the <b>Department</b>.</li> </ul> </li> <li>b. subject to condition 21D, implement the RAMP from the RAMP implementation date.</li> </ul>
Variation dated 4/4/2019	21C. The <b>approval holder</b> may revoke its choice to implement a RAMP under condition 21A at any time by giving written notice to the <b>Department</b> . If the approval holder revokes the choice under condition 21A, the <b>approval holder</b> must implement the action management plan in force immediately prior to that RAMP.
Variation dated 4/4/2019	21D. If the <b>Minister</b> gives a notice to the <b>approval holder</b> that the <b>Minister</b> is satisfied that the taking of the action in accordance with the RAMP would be likely to have a <b>new or increased impact</b> , then: <ul style="list-style-type: none"> <li>a. condition 21A does not apply, or ceases to apply, in relation to the RAMP; and</li> <li>b. the <b>approval holder</b> must implement the action management plan specified by the <b>Minister</b> in the notice.</li> </ul>

Date of decision	Conditions attached to approval
Variation dated 4/4/2019	<p>21E. At the time of giving the notice under condition 21D, the <b>Minister</b> may also notify that, for a specified period of time, condition 21A does not apply for one or more specified action management plans.</p> <p><b>Note:</b> Conditions 21A, 21B, 21C and 21D are not intended to limit the operation of section 143A of the <b>EPBC Act</b> which allows the <b>approval holder</b> to submit a revised action management plan, at any time, to the <b>Minister</b> for approval.</p>
Original dated 9/8/2018	<p>22. Unless otherwise agreed to in writing by the <b>Minister</b>, the <b>approval holder</b> must publish all management and research plans referred to in these conditions of approval on its website. Each plan must be published on the website within one month of being approved and remain published on the website for the duration of the approval.</p>


Date of decision	Definitions attached to approval
Original dated 9/8/2018	<p><b>Approval holder</b> – the person to whom the approval is granted, or to whom the approval is transferred under s145B of the <b>EPBC Act</b>.</p>
Original dated 9/8/2018	<p><b>BioBanking</b> – the New South Wales Government’s biodiversity <b>credit</b> and offset scheme of that name created under the <i>Threatened Species Conservation Act 1995</i> (NSW), as amended and repealed or an equivalent scheme under a <b>successor mechanism</b> under the <i>Biodiversity Conservation Act 2016</i> (NSW).</p>
Original dated 9/8/2018	<p><b>BioBanking Agreement</b> – has the meaning given under the under the <i>Threatened Species Conservation Act 1995</i> (NSW), as amended and repealed, or an equivalent under a <b>successor mechanism</b> under the <i>Biodiversity Conservation Act 2016</i> (NSW).</p>
Original dated 9/8/2018	<p><b>BioBanking site(s)</b> – has the meaning given under the under the <i>Threatened Species Conservation Act 1995</i> (NSW), as amended and repealed or an equivalent under a successor mechanism under the <i>Biodiversity Conservation Act 2016</i> (NSW).</p>
Original dated 9/8/2018	<p><b>BioBanking Statement</b> – has the meaning given under the <i>Threatened Species Conservation Act 1995</i> (NSW) or an equivalent report under a successor mechanism under the <i>Biodiversity Conservation Act 2016</i> (NSW).</p>
Original dated 9/8/2018	<p><b>Box Gum Woodland</b> – refers to the White Box-Yellow Box-Blakely’s Red Gum Grassy Woodland and Derived Native Grassland ecological community listed as critically endangered under the <b>EPBC Act</b>.</p>
Variation dated 4/4/2019	<p><b>Business Day</b> - means a day that is not a Saturday, a Sunday or a public holiday in the state or territory of the action.</p>
Variation dated 4/4/2019	<p><b>Commence/Commenced/Commencement/Commencement of the action</b> –means the first instance of any specified activity associated with the action including clearance of vegetation and <b>construction</b> of any infrastructure. Commencement does not include minor physical disturbance necessary to:</p> <ul style="list-style-type: none"> <li>i. undertake pre-clearance surveys or monitoring programs;</li> <li>ii. use of existing surface access tracks;</li> <li>iii. install signage and /or temporary fencing to prevent unapproved use of the project area;</li> <li>iv. protect environmental and property assets from fire, weeds and pests, and maintenance of existing surface access tracks, if agreed in writing by the <b>Department</b>;</li> <li>v. geotechnical works comprising bore hole and test pit excavations, each no greater than 2m x 2m in area on the ground surface;</li> <li>vi. site survey and installation of survey markers;</li> <li>vii. site assessment and observation, including road dilapidation survey; and</li> <li>viii. road and intersection upgrades as defined in Appendix 7 Schedule of Road Upgrades of the <b>NSW development consent</b>.</li> </ul> <p>Note: Pre-commencement activities as above must comply with other general conditions.</p>









Date of decision	Definitions attached to approval
Original dated 9/8/2018	<b>Commissioning</b> – means the testing of turbine infrastructure to demonstrate performance in accordance with the design requirements.
Variation dated 4/4/2019	<b>Construction</b> - means the erection of a building or structure that is or is to be fixed to the ground and wholly or partially fabricated on-site; the alteration, maintenance, repair or demolition of any building or structure; preliminary site preparation work which involves breaking of the ground (including pile driving); the laying of pipes and other prefabricated materials in the ground, and any associated excavation work; but excluding the installation of fences and signage.
Original dated 9/8/2018	<b>Credits</b> – has the meaning given under the under the <i>Threatened Species Conservation Act 1995</i> (NSW), as amended and repealed, or an equivalent report under a successor mechanism under the <i>Biodiversity Conservation Act 2016</i> (NSW).
Original dated 9/8/2018	<b>Department</b> – the Australian Government Department administering the <b>EPBC Act</b> .
Original dated 9/8/2018	<b>EPBC Act</b> – the Commonwealth <i>Environment Protection and Biodiversity Conservation Act 1999</i> .
Original dated 9/8/2018	<b>Golden Sun Moth</b> – ( <i>Synemon plana</i> ) is a threatened species listed as critically endangered under the <b>EPBC Act</b> .
Variation dated 4/4/2019	<b>Hollow bearing tree</b> – a living tree, where the trunk or limbs contain hollows, holes or cavities. Such hollows may not always be visible from the ground but may be apparent from the presence of deformities such as protuberances of broken limbs, or where it is apparent the head of the tree has broken off.
Variation dated 4/4/2019	<b>Known and potential Superb Parrot nest trees</b> means trees of the species River Red Gum, Blakely's Red Gum <i>E. blakelyi</i> , Apple Box <i>E. bridgesiana</i> , Grey Box, White Box <i>E. albens</i> and Red Box <i>E. polyanthemus</i> with hollows located 5–13 m above the ground as specified in the <i>National Recovery Plan for the Superb Parrot (Polytelis swainsonii)</i> and that have a hollow diameter >5cm (Manning et al 2012).
Original dated 9/8/2018	<b>Minister</b> – The Australian Government minister responsible for administering the <b>EPBC Act</b> or any nominated delegate.
Original dated 9/8/2018	<b>National Superb Parrot Recovery Team</b> – Team of appropriately qualified persons responsible for co-ordinating national research and management efforts specified in the National Recovery Plan for the Superb Parrot ( <i>Polytelis swainsonii</i> ).
Variation dated 4/4/2019	<b>New or increased impact</b> - means a new or increased environmental impact or risk relating to any <b>protected matter</b> , when compared to the likely impact of implementing the action management plan that has been approved by the <b>Minister</b> under conditions 5, 6 and 13, including any subsequent revisions approved by the <b>Minister</b> , as outlined in the <i>Guidance on 'New or Increased Impact' relating to changes to approved management plans under EPBC Act environmental approvals (2017)</i> .
Original dated 9/8/2018	<b>NSW development consent</b> – means the development consent granted to the Bango Wind Farm under Section 4.38 of the <i>Environmental Planning Assessment Act 1979</i> (NSW), SSD-6686.
Original dated 9/8/2018	<b>Offset attributes</b> – mean an '.xls' file capturing relevant attributes of the offset site, including the <b>EPBC Act</b> reference ID number, the physical address of the offset site, coordinates of the boundary points in decimal degrees, the <b>EPBC Act</b> protected matters that the offset compensates for, any additional <b>EPBC Act</b> protected matters that are benefiting from the offset, and the size of the offset in hectares.
Original dated 9/8/2018	<b>Onsite infrastructure</b> means – <ul style="list-style-type: none"> <li>• Up to 71 wind turbines each with a maximum height of 200 metres (m) (measured from ground to the blade tip). Each turbine will have associated infrastructure including a foundation and crane hardstand area.</li> </ul>

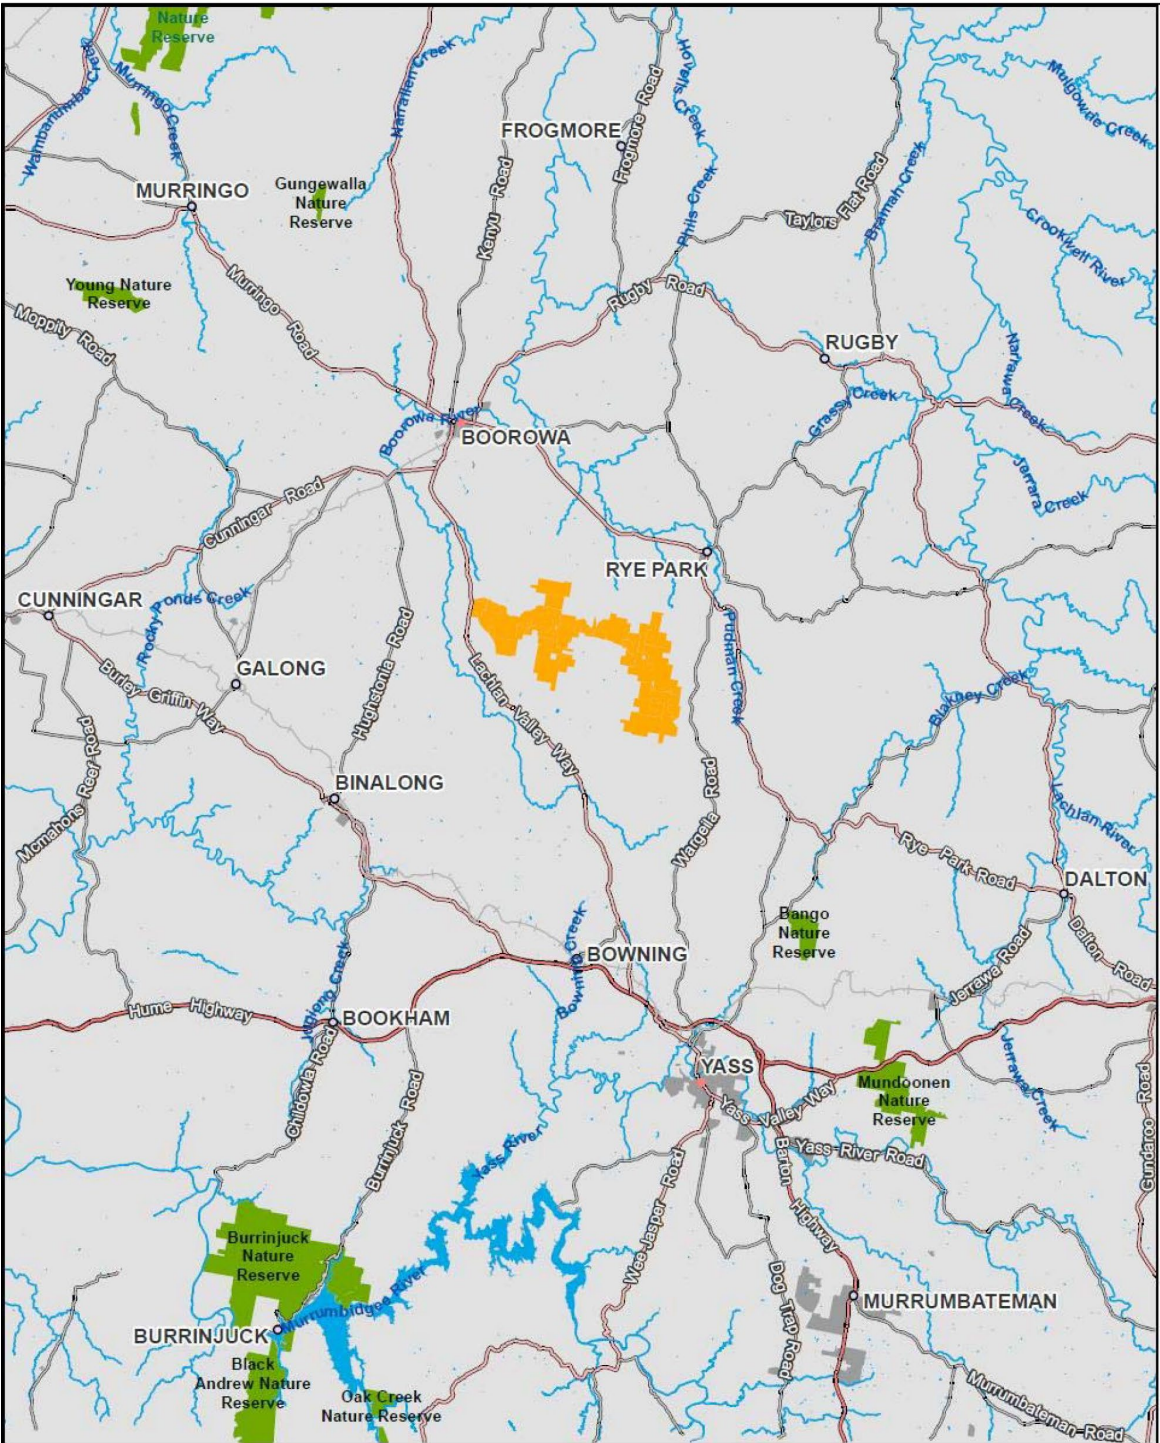






Date of decision	Definitions attached to approval
	<ul style="list-style-type: none"> <li>• A collector substation, switching station, site compound, lay down areas, site operations facilities and services buildings.</li> <li>• Overhead and underground high voltage electrical cabling.</li> <li>• Onsite access roads.</li> <li>• Four permanent monitoring masts.</li> </ul>
Original dated 9/8/2018	<b>Primary Hollow Bearing Tree</b> – includes trees of the Blakely’s Red Gum, Yellow Box, Apple Box, White Box species or dead stags, containing hollows 5-13m above the ground of greater than 5cm diameter, as defined in the Bango Wind Farm Preliminary Documentation (p58, footnote 9).
Original dated 9/8/2018	<b>Protected matters</b> – any matter protected under the provision of the EPBC Act for which this approval has effect. The relevant protected matters for this project are: Golden Sun Moth and <b>Superb Parrot</b> .
Original dated 9/8/2018	<b>Qualified ecologist</b> – means an independent person with relevant tertiary qualifications and a minimum of five years’ experience in Australian flora and fauna surveys in New South Wales.
Original dated 9/8/2018	<b>Retire/ retirement</b> – A change in the status of a credit such that the credit has been used to offset the development impact or achieve a conservation outcome and can no longer be bought or sold.
Variation dated 4/4/2019	<b>Shapefiles</b> – means an ESRI Shapefile containing ‘.shp’, ‘.shx’, ‘.prj’ and ‘.dbf’ files and other files capturing attributes of the offset site, including the shape, EPBC Act reference ID number and protected matters present at the relevant site and specification of the projection/geographic coordinate system used. Attributes should also be captured in ‘.xls’ format.
Original dated 9/8/2018	<b>South-west Slopes of NSW Important Bird Area</b> – means the area identified by BirdLife Australia as the core distribution of the Superb Parrot on the south-west slopes of New South Wales, as described and mapped in the Birdlife factsheet available here: <a href="http://datazone.birdlife.org/site/factsheet/24574">http://datazone.birdlife.org/site/factsheet/24574</a> .
Original dated 9/8/2018	<p><b>Successor mechanism</b> – any biodiversity offsetting mechanism legislated and implemented by the New South Wales Government to replace, or as a successor to, BioBanking. Such a mechanism is only acceptable for the purposes of this approval if it:</p> <ul style="list-style-type: none"> <li>• is included in a bilateral agreement under the <b>EPBC Act</b> (either referenced directly in the agreement, or as part of a wider process that is adopted in a bilateral agreement) OR</li> <li>• has been agreed by the <b>Department</b> in writing to the <b>approval holder</b> or the title holder as being an appropriate successor mechanism.</li> </ul>
Original dated 9/8/2018	<b>Superb Parrot</b> – ( <i>Polytelis swainsonii</i> ) is a threatened species listed as vulnerable under the <b>EPBC Act</b> .

Date of decision **Annexures**

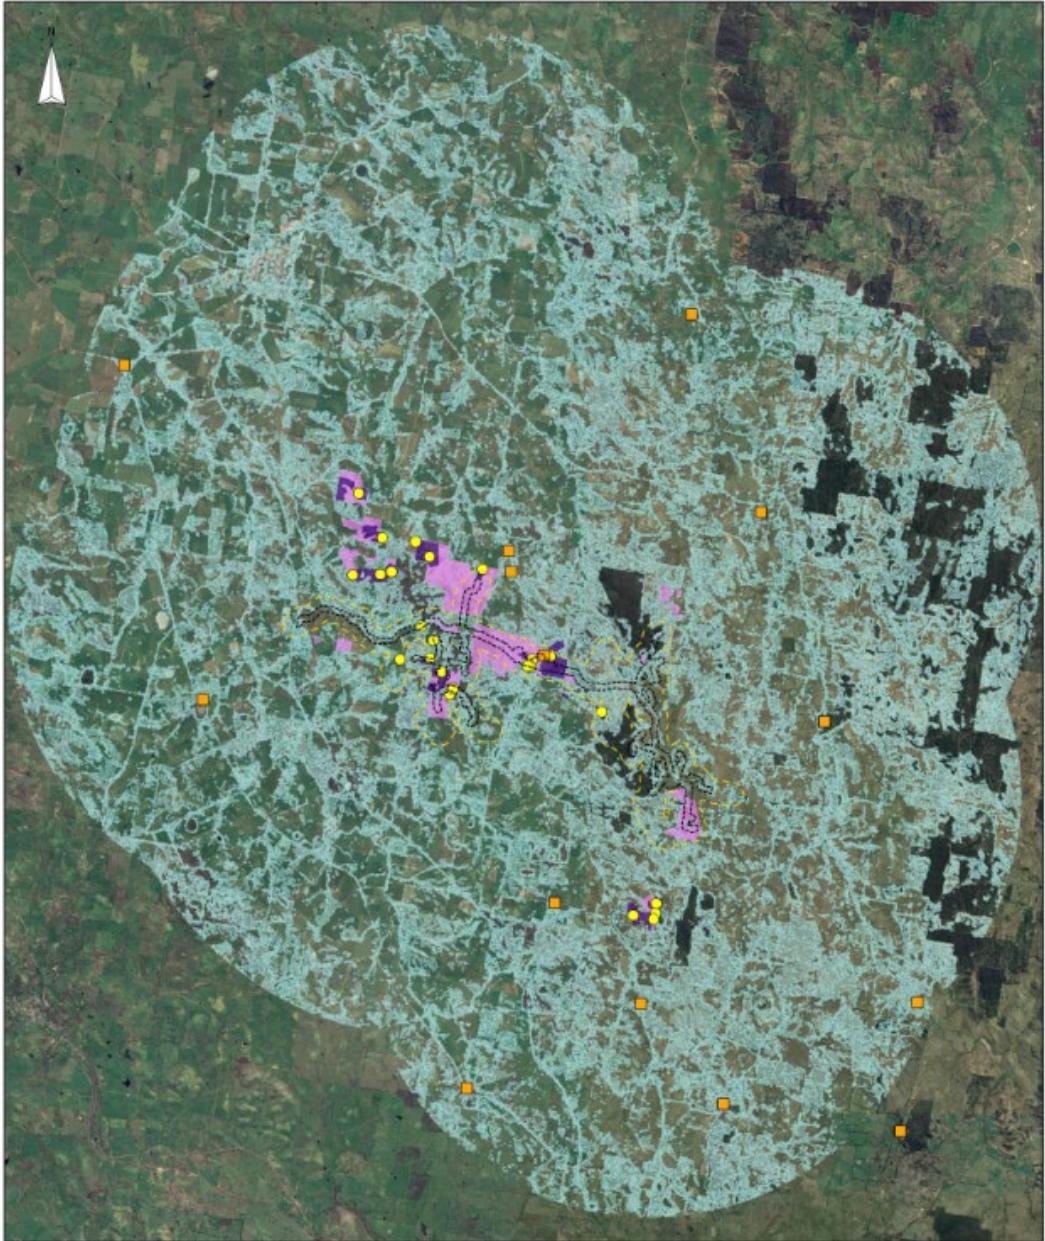Original dated 9/8/2018 **Annexure A – location of Bango Wind Farm**




 <b>NSW</b> GOVERNMENT <b>Planning &amp; Environment</b> <b>Bango Wind Farm (SSD 6686)</b>	 Project site	
	 Waterbody  Conservation Area  Railway	
 		

<b>Date of decision</b>	<b>Annexures</b>																																																						
Variation dated 4/4/2019	<p data-bbox="391 309 1412 369">Annexure B – GSM Survey results and extent of GSM habitat in the locality – updated 22 March 2019</p>  <table border="1" data-bbox="395 1641 1444 1892"> <tr> <td colspan="2" data-bbox="395 1641 922 1668">LEGEND</td> <td colspan="2" data-bbox="922 1641 1300 1668">COMPANY</td> <td colspan="2" data-bbox="1300 1641 1444 1713" rowspan="2">  </td> </tr> <tr> <td colspan="2" data-bbox="395 1668 922 1892"> <ul style="list-style-type: none"> <li><span style="color: yellow;">●</span> Golden Sun Moth Locations</li> <li><span style="color: orange;">■</span> 2012 Survey Season</li> <li><span style="color: orange;">■</span> Previous Records (BioNET)</li> <li><span style="background-color: cyan; border: 1px solid black; display: inline-block; width: 15px; height: 10px;"></span> Potential Habitat (OCH native grassland modelling)</li> <li><span style="background-color: magenta; border: 1px solid black; display: inline-block; width: 15px; height: 10px;"></span> Potential Habitat</li> <li><span style="background-color: purple; border: 1px solid black; display: inline-block; width: 15px; height: 10px;"></span> Known / Optimal Habitat</li> <li><span style="border-bottom: 1px dashed black; display: inline-block; width: 20px;"></span> 49 WTG 100m development corridor</li> <li><span style="border-bottom: 1px dashed yellow; display: inline-block; width: 20px;"></span> Approved 500m Permanent Impact Area Buffer</li> </ul> </td> <td colspan="2" data-bbox="922 1668 1300 1713">BANGO WIND FARM PTY LTD</td> <td colspan="2" data-bbox="922 1713 1300 1758">TITLE</td> </tr> <tr> <td colspan="2" data-bbox="395 1758 922 1892">  </td> <td colspan="2" data-bbox="922 1713 1300 1758">GSM HABITAT IN LOCALITY</td> <td data-bbox="922 1758 1050 1792">DATE</td> <td data-bbox="1050 1758 1177 1792">SCALE</td> </tr> <tr> <td colspan="2" data-bbox="395 1792 922 1836"></td> <td data-bbox="922 1792 1050 1836">22 MAR 2019</td> <td data-bbox="1050 1792 1177 1836">1:160000</td> <td data-bbox="1177 1792 1300 1836">DWO NO</td> <td data-bbox="1300 1792 1369 1836">REV</td> </tr> <tr> <td colspan="2" data-bbox="395 1836 922 1881"></td> <td data-bbox="922 1836 1050 1881">T BEHRENDT</td> <td data-bbox="1050 1836 1177 1881">M FLOWER</td> <td data-bbox="1177 1836 1300 1881">167</td> <td data-bbox="1300 1836 1369 1881">A</td> </tr> <tr> <td colspan="2" data-bbox="395 1881 922 1912"></td> <td data-bbox="922 1881 1050 1912"></td> <td data-bbox="1050 1881 1177 1912"></td> <td data-bbox="1177 1881 1300 1912">SHEET</td> <td data-bbox="1300 1881 1369 1912">NER</td> </tr> <tr> <td colspan="2" data-bbox="395 1912 922 1912"></td> <td data-bbox="922 1912 1050 1912"></td> <td data-bbox="1050 1912 1177 1912"></td> <td data-bbox="1177 1912 1300 1912">1 OF 1</td> <td data-bbox="1300 1912 1369 1912">2</td> </tr> <tr> <td colspan="2" data-bbox="395 1912 922 1912"></td> <td data-bbox="922 1912 1050 1912"></td> <td data-bbox="1050 1912 1177 1912"></td> <td data-bbox="1177 1912 1300 1912">JOB NO</td> <td data-bbox="1300 1912 1444 1912">SIZE</td> </tr> <tr> <td colspan="2" data-bbox="395 1912 922 1912"></td> <td data-bbox="922 1912 1050 1912"></td> <td data-bbox="1050 1912 1177 1912"></td> <td data-bbox="1177 1912 1300 1912">080811</td> <td data-bbox="1300 1912 1444 1912">A3</td> </tr> </table>	LEGEND		COMPANY				<ul style="list-style-type: none"> <li><span style="color: yellow;">●</span> Golden Sun Moth Locations</li> <li><span style="color: orange;">■</span> 2012 Survey Season</li> <li><span style="color: orange;">■</span> Previous Records (BioNET)</li> <li><span style="background-color: cyan; border: 1px solid black; display: inline-block; width: 15px; height: 10px;"></span> Potential Habitat (OCH native grassland modelling)</li> <li><span style="background-color: magenta; border: 1px solid black; display: inline-block; width: 15px; height: 10px;"></span> Potential Habitat</li> <li><span style="background-color: purple; border: 1px solid black; display: inline-block; width: 15px; height: 10px;"></span> Known / Optimal Habitat</li> <li><span style="border-bottom: 1px dashed black; display: inline-block; width: 20px;"></span> 49 WTG 100m development corridor</li> <li><span style="border-bottom: 1px dashed yellow; display: inline-block; width: 20px;"></span> Approved 500m Permanent Impact Area Buffer</li> </ul>		BANGO WIND FARM PTY LTD		TITLE				GSM HABITAT IN LOCALITY		DATE	SCALE			22 MAR 2019	1:160000	DWO NO	REV			T BEHRENDT	M FLOWER	167	A					SHEET	NER					1 OF 1	2					JOB NO	SIZE					080811	A3
LEGEND		COMPANY																																																					
<ul style="list-style-type: none"> <li><span style="color: yellow;">●</span> Golden Sun Moth Locations</li> <li><span style="color: orange;">■</span> 2012 Survey Season</li> <li><span style="color: orange;">■</span> Previous Records (BioNET)</li> <li><span style="background-color: cyan; border: 1px solid black; display: inline-block; width: 15px; height: 10px;"></span> Potential Habitat (OCH native grassland modelling)</li> <li><span style="background-color: magenta; border: 1px solid black; display: inline-block; width: 15px; height: 10px;"></span> Potential Habitat</li> <li><span style="background-color: purple; border: 1px solid black; display: inline-block; width: 15px; height: 10px;"></span> Known / Optimal Habitat</li> <li><span style="border-bottom: 1px dashed black; display: inline-block; width: 20px;"></span> 49 WTG 100m development corridor</li> <li><span style="border-bottom: 1px dashed yellow; display: inline-block; width: 20px;"></span> Approved 500m Permanent Impact Area Buffer</li> </ul>		BANGO WIND FARM PTY LTD				TITLE																																																	
		GSM HABITAT IN LOCALITY		DATE	SCALE																																																		
		22 MAR 2019	1:160000	DWO NO	REV																																																		
		T BEHRENDT	M FLOWER	167	A																																																		
				SHEET	NER																																																		
				1 OF 1	2																																																		
				JOB NO	SIZE																																																		
				080811	A3																																																		

**Date of decision**  
Variation dated 4/4/2019

**Annexures**

Annexure C – Superb parrot survey results and the extent of Superb Parrot habitat and hollow bearing trees in the locality – updated 22 March 2019

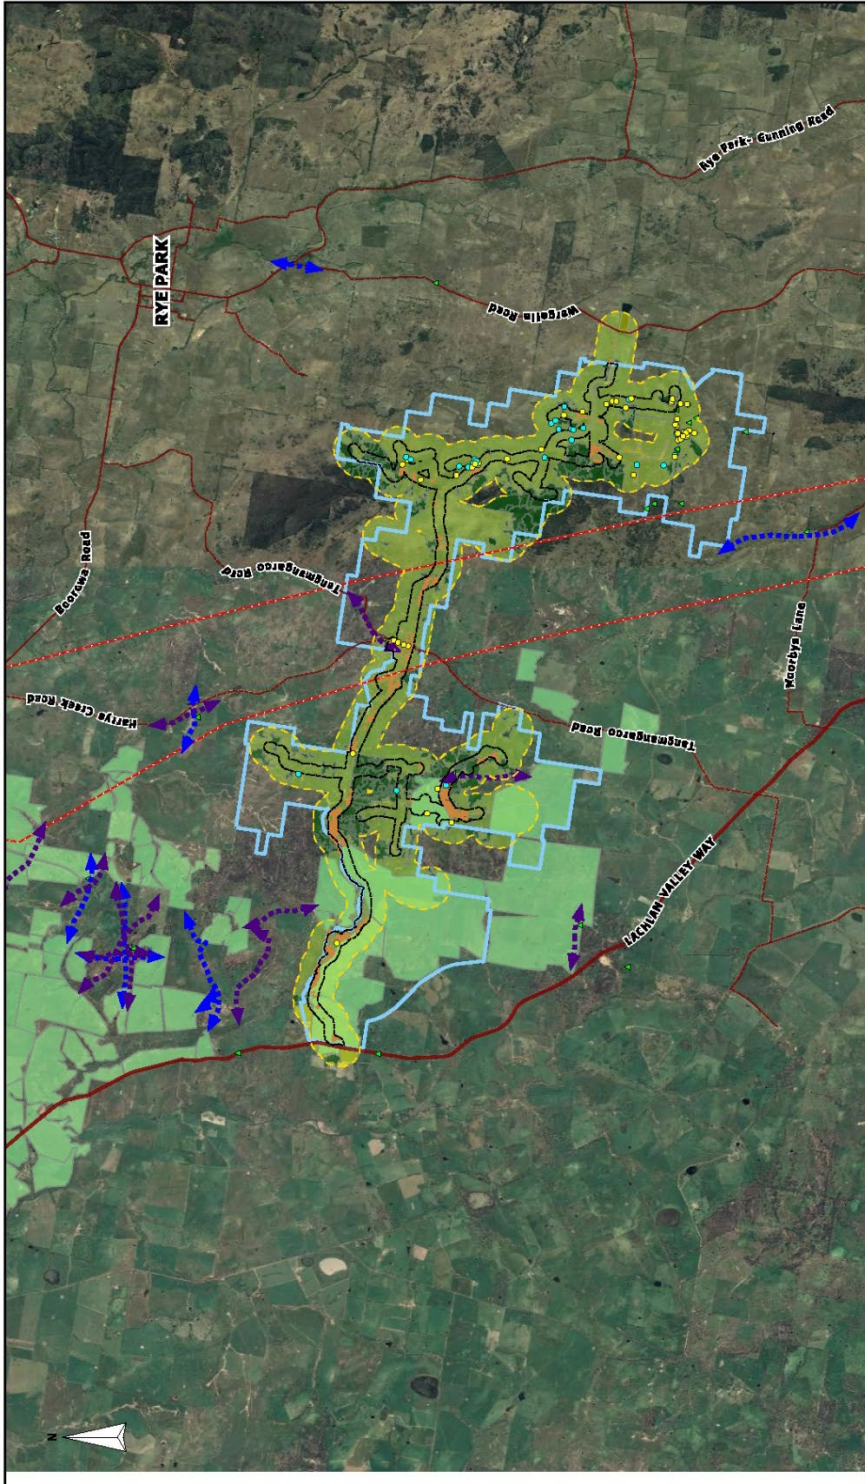

**CWP** CONSULTING

**BANGO WIND FARM PTY LTD**

**SUPERB PARROT RESULTS - OVERVIEW**

DATE	22 MAR 2019	SCALE	1:100000	DWG NO	178	REV	A	VER	2
DRAWN BY	T BEIRENROT	CHECKED BY	M FLOWER	SHEET	1 OF 1	JOB NO	060811	SIZE	A3

**LEGEND**

- Solid Road
- Unsealed Road
- 49 WTC 100m development corridor
- Approved 500m Permanent
- Controlled Mapped in ERM (2013)
- as Suitable Superb Parrot Foraging Impact Area Buffer

**132 kV Transmission Line**

- Hollow bearing Tree (Primary)
- Hollow bearing Tree (Secondary)
- General Flight paths
- AM
- PH
- Superb Parrot Sightings (ERM 2012/13)

**Superb Parrot Habitat: Central West Lachlan Vegetation by OEH (2017) in 500m Buffer**

- Woodlands
- Grasslands
- Not Native/ Agricultural


0 10 km

Date of decision

Annexures

Variation dated 4/4/2019

Annexure D – the extent of Box Gum Woodland in the locality - updated 22 March 2019

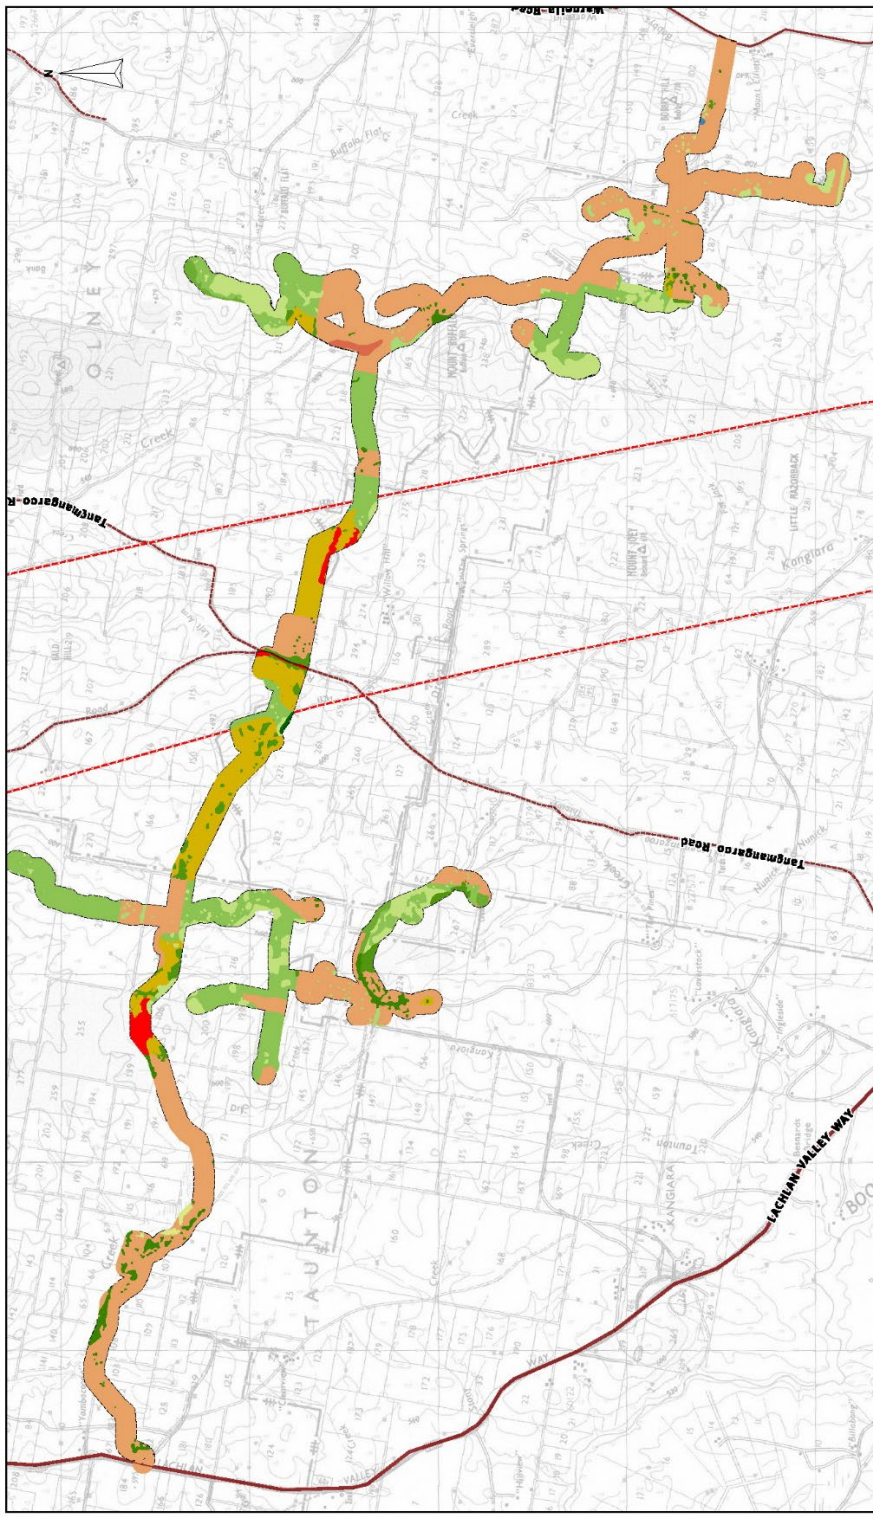

**CWP** CONSULTING

**BANGO WIND FARM PTY LTD**

**VEGETATION ZONES IN THE 100m STUDY AREA (ELA 2018) - OVERVIEW**

DATE	22 MAR 2019	SCALE	1:42000	DWG NO	177	REV	A	VER	2
DRAWN BY	T BEHRENDT	CHECKED BY	M FLOWER	BRIEF	1 OF 1	JOB NO	080811	SIZE	A3

**LEGEND**

	349_Natu/S		Cleared
	256_Natu/S		Dam
	277_DNG		Excotic
	352_DNG		Scrubland
	352_EkU/S		Track
	277_EPRC		
	277_EkU/S		
	277_Natu/S		

132 kV Transmission Line  
 Unsealed Road  
 Sealed Road  
 49 W/100m development corridor

0 4 km

SCALE BAR